




GPF5 GAS METER BOX

Surface mounted replacement gas door and body

Specification & Key Features

- Manufactured from 1.2mm Zinc Coated Steel
- Phosphate pre-treatment to add a level of corrosion protection (subject to long-term condition of box and location of install)
- Powder coated using high quality UK manufactured powder coating suppliers
- Hinged on the left side.
- Two triangle key locks (key also supplied)
- Made in the UK
- Cut-outs already in place to allow for pipe entry and exit (relevant boxes only)

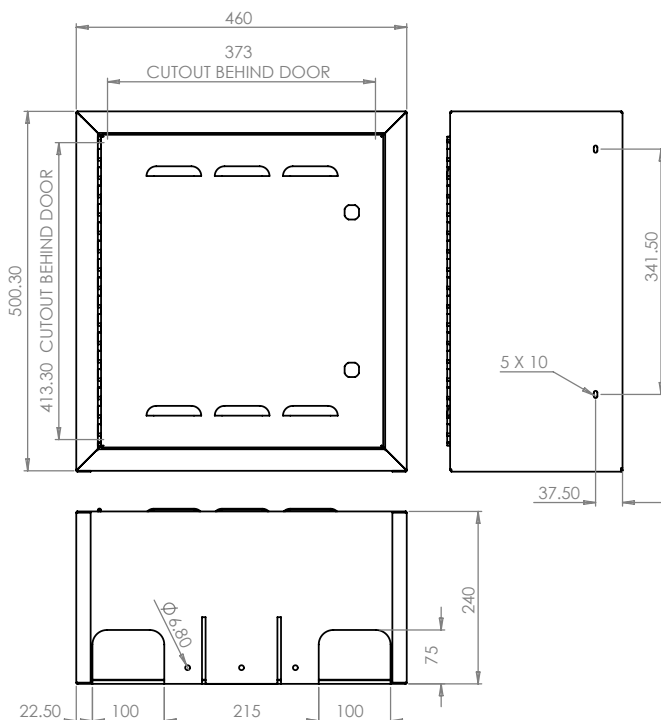

Installation Instructions

Installation should be carried out by a competent person

The original Mark 1 and Mark 2 GRP box is made up in two sections. The backplate on the wall and the external housing which secures to the backplate. To install our GPF5 the external GRP housing needs to be removed; if just the backplate remains on the wall skip to step 3.

1. Open the GRP door with your original key.
2. From inside the unit, push down on the base of the plastic housing. This will detach the bracket from the backplate.
3. Remove all packaging from the new unit and remove the key on the back of the door.
4. Open the door with the key.
5. Now offer up our unit to the backplate; remembering to hook the top of our box to the original backplate first.
6. Then, bring down the rest of the box so it is sitting on the backplate.
7. Now looking at the base of our product from inside the door; you will notice in their middle there are two slots with a return fold facing up. Push down on this and this will clip to the back of the original backplate.
8. For additional security you can use our fixture bracket to secure to the brickwork. Secure the bracket to our box using a suitable M4 screw/ bolt. Once in place you will be able to mark your fixing holes with a pilot drill into the wall.
9. Remove the bracket and drill the holes. Insert 4 x suitably sized rawl plugs.
10. Once the holes have been drilled, you can then fasten the bracket to the box and secure to the wall once again.
11. Close the door and secure locks.
12. We recommend that the top edge and sides are bonded to the wall with a suitable silicone seal.

Once installation is complete please dispose of all rubbish in an environmentally friendly way.

Recommended tools

- | | |
|------------------------------------|--|
| • Marker pen | • 8 x self-tapping screws (4mm x 13mm) |
| • Drill & drill bit to suit screws | • 4 x screws (4mm x 10mm) |
| • Suitable screw driver | • External silicone |
| • Spirit level | |

Approximate dimensions: DKM manufacture all of their own products; dimensions are subject to DKM Sheet Metal's commercial tolerance* Remember electricity and gas can kill please ensure that you are able to safely carry out the installation. If for any reason you decide that the installation carries a risk DO NOT proceed and contact your utility company on their emergency call out number.