





EPF HEPWORTH ELECTRIC METER BOX

Hepworth replacement electric door and frame

Specification & Key Features

- Manufactured from 1.2mm Zinc Coated Steel
- Phosphate pre-treatment to add a level of corrosion protection (subject to long-term condition of box and location of install)
- Powder coated using high quality UK manufactured powder coating suppliers
- Hinged on the left side; but the design allows this product to fit onto both left hand and right-hand hinges
- Two triangle key locks (key also supplied)
- Made in the UK
- Cut-outs already in place to allow for pipe entry and exit (relevant boxes only)

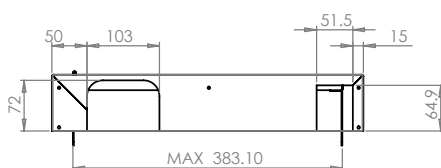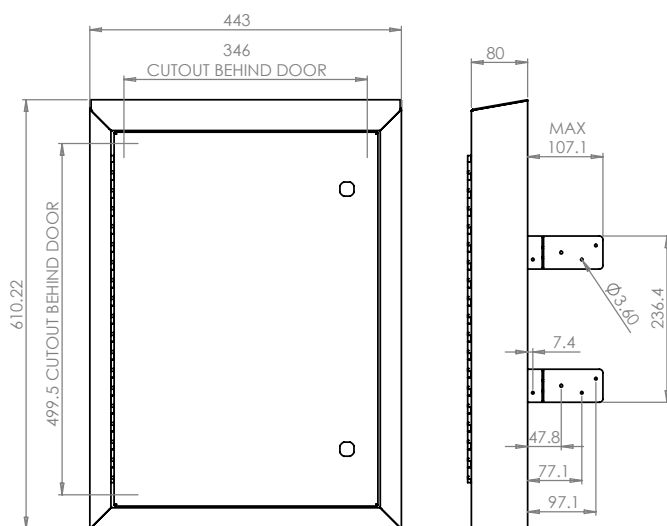

COVER PLATE SUPPLIED TO COVER CUTOUTS
NOT SHOWN IN THIS VIEW.

Installation Instructions

Installation should be carried out by a competent person

1. Remove the old door if it is still present.
2. Remove all packaging from the new unit and remove the key on the back of the door.
3. Open the door with the key.
4. The galvanised brackets will be folded inwards for transport purposes. Extend these out so they are facing out the back of the unit as you are looking through the door.
5. Offer the new unit up (it should slide over the existing unit).
6. It may be necessary to adjust the brackets which are riveted to the frame; the perforations allow this to be done 2/3 times. Please proceed with caution as any more than this will cause the bracket to become weak and snap off.
7. Mark one side of the composite box with a marker pen or similar.
8. Drill four small holes at the marks to suit the screws.
9. Offer up the unit again and secure the one side of the metal meterbox with four screws.
10. Use the spirit level to make sure the box is straight.
11. Mark the other side of the composite box with a marker pen or similar.
12. Drill four small holes at the marks to suit the screws.
13. Secure the two other brackets with four screws, fastening to the internal composite box.
14. Close the door and secure locks.
15. We recommend that the top edge and sides are bonded to the wall with a suitable silicone seal.

Once installation is complete please dispose of all rubbish in an environmentally friendly way.

Recommended tools

- Marker pen
- Drill & drill bit to suit screws
- Suitable screw driver
- Spirit level
- 8 x self-tapping screws (4mm x 13mm)
- External silicone

Approximate dimensions: DKM manufacture all of their own products; dimensions are subject to DKM Sheet Metal's commercial tolerance*
Remember electricity and gas can kill please ensure that you are able to safely carry out the installation. If for any reason you decide that the installation carries a risk DO NOT proceed and contact your utility company on their emergency call out number.

© 2023 DKM Sheet Metal Ltd. MeterBox, Unit 9, Oldends Lane Industrial Estate, Stonehouse, GL10 3RQ • Tel: 01453 827661 • meterbox.co.uk